

GOVERNMENT TENDER NOTICE

Notice Inviting Tender Nos.89,90,91,92,93 & 94/SERI/PCR/Nadia/2017-18.

Sealed quotations are invited by the **Executive Engineer**, Directorate of Textiles(Sericulture), West Bengal, 45, Ganesh Chandra Avenue (2nd floor), Kolkata-13 for Constructional works in Nadia district from the enlisted contractors of P.W. Deptt. (Elec.), CB Directorate, as well as from the bonafide experienced and resourceful outside contractors having experience in such type of works in Govt. Department / Zilla Parishad.

NIT No.	Name of the Work.	Estimated Cost	Earnest Money	Place of Work.	Time of completion of work.
89	Repairing of Doors & window of Rearing House No.1 & 2 with over-head Tank on Security Qtr. including water supply arrangement at Karimpore Sericulture Complex. Nadia under P.C.R.	Rs.3,00,396/- (Rupees three lakh three hundred ninety six) only.	Rs.7,510/- (Rupees seven thousand five hundred ten)	Karimpore Sericulture Complex. Nadia	1(one) month from the date of issue of Work Order.
90	Repairing of Roof of old Pump House including allied works at Ranaghat Sericulture Complex. Nadia under P.C.R.	Rs.1,62,948/- (Rupees one lakh sixty two thousand nine hundred forty eight) only	Rs.4,075/- (Rupees four thousand seventy five) only	Ranaghat Seri. Complex. Nadia.	-do-
91	Repairing of doors & window of Reeling House Nos.1 & 2 with pucca plat form at Shibnibas Sericulture Farm. under P.C.R.	Rs.4,74,818/- Rupees four lakh seventy four thousand eight hundred eighteen) only.	Rs.11,890/- (Rupees eleven thousand eight hundred ninety) only.	Shibnibas Sericulture Farm. Nadia.	-do-
92	Repairing of 2(two) Nos. Gr.-'D' Qtrs. and 1(one) No. Demonstrators Qtr. with connecting road at Shibnibas Sericulture Farm. Nadia under P.C.R.	Rs.4,25,042/- (Rupees four lakh twenty five thousand forty two) only	Rs.10,626/- (Rupees ten thousand six hundred twenty six) only.	-do-	-do-
93	Renovation & Re-arrangement of inside Office Building of the Deputy Director of Textiles(Seri). Krishnagar Nadia under P.C.R.	Rs.4,98,614/- (Rupees four lakh ninety eight thousand six hundred fourteen) only.	Rs.12,465/- (Rupees twelve thousand four hundred sixty five) only.	O/o. the Deputy Director. Textiles (Seri). Krishnagar Nadia.	-do-
94	Post construction of Anti-termite treatment for Office Building of the Deputy Director of Textiles(Seri). Krishnagar Nadia under P.C.R.	Rs.89,194/- (Rupees eighty nine thousand one hundred ninety four) only.	Rs.2,230/- (Rupees two thousand two hundred thirty) only.	-do-	-do-

The quotation Papers (N.I.T., Schedule of Works. & Form : 2911(i/ii) etc.) may be obtained/downloaded from seriwb.gov.org at free of cost. Duly filled quotation to be submitted/dropped in the Box kept at Head Quarters, Kolkata and papers should be arranged in the following manner.

Envelope - I, should be superscribed as Technical Bid for N.I.T. No....., Sl.No. of Work. Name of the Agency and it should contain copy of Self Attested i) PAN Card. (ii) Last I.T. Return. (AY 2016-17) (iii) GST IN Registration Certificate which is valid for the current period, (iv) Professional Tax Clearance and Challan for the last financial year. (v) Credential for Similar nature of work at about 60% of Tender value). the **Pesticide License** is required for NIT No.94 and E.M.D. Sealed.

Envelope - II, should be super scribed as Financial Bid for N.I.T.No....., Sl.No. of Work, Name of Agency and should contain filed on 2911 (ii) quoting in Rate both in figure and words. and Sealed.

2(two) Envelopes as noted above (I & II) should be put in a bigger Envelope and sealed. Agency should write clearly N.I.T. No..... Name of Work, SL. No. and Name of Agency on this Envelope and drop the same as per scheduled mentioned in this N.I.T.

Last date and time of submission of Tender	21-03-2018 at 3-00 P.M. at Headquarters, Kolkata.
Date of opening of Tender	21.03.2018 after 3-30 P.M. at Headquarters, Kolkata.


Technical Bid will be opened first. Financial Bid will be opened only if the Technical Bid is found acceptable.

Labour Cess will be deducted from Bill value as per Govt. Rules. All original copies are to be shown for verification. The details may be seen in the Office of the **Commissioner of Textiles (Sericulture), West Bengal** 45, Ganesh Ch. Avenue (2nd floor), Kolkata - 700 013 on any working days and in website : seriwb.gov.org.

N.S.C./K.V.P. will not be accepted as Earnest Money. Only the Demand Draft / Bankers Cheque of a Nationalized Bank will be considered.

The Commissioner of Textiles (Sericulture), West Bengal reserves the right to reject/accept all the applications without showing any reasons thereof. If any date as above happens to be holiday the next working day will be considered as stipulated date. Acceptance of lowest Tender is not obligatory.

Notwithstanding anything contained in this N.I.T., the general and other terms and conditions will be binding upon all concerned.

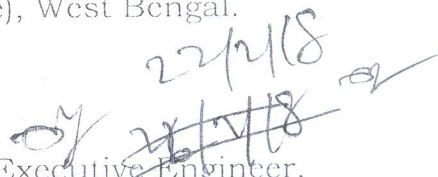

Executive Engineer,
Directorate of Textiles(Sericulture),
West Bengal.

Memo.No: 4057(3)/ENG/CIVIL/PCR/3 (Vol.-4),

Dated, 22/02/2018.

Copy forwarded for information & necessary action to :-

1. The Deputy Director of Textiles (Sericulture),
Krishnagar, Nadia.
2. The Notice Board of this Directorate, Headquarters, Kolkata.
3. The Website of this Directorate of Textiles (Sericulture), West Bengal.


Executive Engineer,
Directorate of Textiles (Sericulture),
West Bengal.

Priced schedule for Repairing of door and window of rearing house no-1 & 2 with overhead tank on Security Qtr.
including water supply arrangement at Karimpore Sericulture complex, Nadia under P.C.R.

Sl.No	Description of item	Quantity	Unit	Rate (Rs.)	Amount(Rs.)
1.	Labour for taking out door and window frame including shutter for repair or replacement of different parts of the frame &refixing the same including mending good all damages complete. (Concrete and brick work for mending damage will be paid separately) Upto area 2.5 Sq.m	30.00	Sq.m	119.00	3570.00
2.	Taking out shutter of door and window, dismantling by parts (for repair or replacement of damaged parts), reassembling and refitting and rehanging same with old fittings but with new screws as necessary. (Where different parts of same shutter are renewed under different item, payment under item 73 will be made once only).	16.00	Sq.m	126.00	2,016.00
3.	Styles and rails of wooden shutters fitted and fixed complete.(Payment to be made on area of new work only). i) 35mm Thick shutter.Gamar	2.00	Sq.m	2,178.00	4,356.00
4.	Panel (made of single plank) of door and window shutters to design as directed: In Ground Floor.(Payment to be made on area of exposed new work). (In case of non-supply of single plank penal rate of reduction to a maximum of 30% will be made).	4.30	Sq.m	1,118.00	4,807.00
5.	Wood work in door and window frame fitted and fixed in position complete including a protective coat of painting at the contact surface of the frame excluding cost of concrete, Iron Butt Hinges and M.S clamps. (The quantum should be corrected upto three decimals). (e) Sal : Malaysian	0.554	Cu.m	1,03,081.00	57,107.00
6.	Supplying, fitting and fixing M.S. clamp for door and window frame made of flat bent bar, end bifurcated, with necessary screws etc. by cement concrete (1:2:4) as per direction. 40mm. X 6mm. 250mm. . Length.	55.00	Each	29.00	1,595.00
7.	Panel shutters of door and window, as per design (each angel consisting of single plank without joint), including fitting and fixing the same in position but excluding the cost of hinge and other fittings. (a)35mm thick shutters with 19mm thick panel. Shisu, Gamar, Champ, Badam, Bhola, Mogra, Hallak.	3.00	Sq.m	2,789.00	8,367.00
8.	Iron butt hinges of approved quality fitted and fixed with steel screws, with ISI mark. (a)100mm. X 58 mm. X 3.50mm.	55.00	Each	47.00	2,585.00
9.	Iron hasp bolt of approved quality fitted and fixed complete (oxidised) with 16mm dia rod with centre bolt and round fitting. (a)300mm long	3.00	Each	166.00	498.00
10.	Supplying best Indian sheet glass panes set in putty and fitted and fixed with nails and putty complete. (In all floors for internal wall &upto 6m height for external wall) 3mm thick.	2.10	Sq.m	477.00	1,002.00
11.	Square or hexagonal mesh netting made with made with 18 B.W.G. galvanised wire, fitted and fixed complete as per design (excluding the supporting framework but including loccalsal wood battens of size 37mm.x25mm.). (a)19mm mesh.	26.00	Sq.m	402.00	10,452.00
12.	125 mm. thick brick work with 1st class bricks in cement mortar (1:4) in ground floor.	5.00	Sq.m	672.00	3,360.00
13.	Stripping off worn out plaster and raking out joints of walls, celings etc. upto any height and in any floor including removing rubbish within a lead of 75m as directed.	121.00	Sq.m	19.00	2,299.00
14.	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course scaffolding/staging where necessary	45.00	Sq.m	180.00	8,100.00

Executive Engineer,
Directorate of Textiles (Sericulture),
West Bengal

	(ground floor). [Excluding cost of chipping over concrete surface] (i) With 1:4 cement mortar (a) 20 mm. thick plasters.				
15.	With 1:4 cement mortar 15 mm. thick plaster	110.00	Sq.m	156.00	17,160.00
16.	Neat cement punning about 1.5 mm. thick in wall, dado, window, sills, floor, drain etc.	57.00	Sq.m	34.00	1,938.00
17.	Dismantling artificial stone flooring up to 50 mm. thick by carefully chiselling without damaging the base and removing rubbish as directed within a lead of 75 m. a) In ground floor including roof.	27.00	Sq.m	50.00	1,350.00
18.	Artificial stone in floor, dado, staircase etc. with cement concrete (1:2:4) with stone chips, laid in panels as directed with topping made with ordinary or white cement (as necessary) and marble dust in proportion (1:2) including smooth finishing and rounding off corners and including application of cement slurry before flooring works, using cement @ 1.75 kg./sq.m. all complete including all materials and labour. (a) 35 mm. thick.	28.00	Sq.m	318.00	8,904.00
19.	Dismantling R.C. floor, roof, beams etc. including cutting rods and removing rubbish as directed within a lead of 75 m. including stacking of steel bars. (a) In ground floor including roof	3.00	Cu.m	1,956.00	5,868.00
20.	Ordinary Cement concrete (mix 1:1.5:3) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement if any, in ground floor as per relevant IS codes. (a) Pakur Variety.	3.00	Cu.m	6,349.20	19,048.00
21.	Hire and labour charges for shuttering with centreing and necessary staging upto 4 m. using approved stout props and thick hard wood planks of approved thickness with required bracing for concrete slabs, beams, columns, lintels curved or straight including fitting, fixing and striking out after completion of works. (upto roof of ground floor) f) 25 mm to 30 mm shuttering without staging in foundation	24.00	Sq.m	330.00	7,920.00
22.	Supplying, fitting and fixing PVC pipes for underground work of approved make (medium duty) conforming to ASTM D - 1785 and Threaded to match with GI Pipes as per IS: 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbow, nipple, long screw, reducing socket, reducing tee, short piece etc. fitted including cost of all materials, jointing materials, cutting pipes, making threads, cutting trenches upto 1.5 metre below surface in all sorts of soil and refilling the same as directed complete in all respect. (Payment will be made on the centre line measurement of the total pipe line including all specials No separate payment will be made for accessories, specials.) (i) 32 mm dias (ii) 25 mm dias (iii) 20 mm dias	48.00 10.00 12.00	M M M	250.00 191.00 143.00	12,000.00 1,910.00 1,716.00
23.	Supplying P.V.C. water storage tank of approved quality with closed top with lid (Black) - Multilayer 500 Litres.	1	Each	2,584.00	2,584.00
24.	Labour for hoisting plastic water storage tank. Upto 1500 Litres.	1	Each	96.00	96.00
25.	Supplying, fitting and fixing Peet's Valve full way gun metal standard Pattern best quality of approved Brand bearing I.S.I. marking with fittings (tested to 21 kg per sq. cm.) (i) 25 mm.	2	Each	912.00	1,824.00

Executive Engineer,
Directorate of Textiles (Sericulture),
West Bengal

26.	Chromium plated Bib Cock short body (Equivalent to Code No.511 & Model - Tropical / Something Special of ESSCO or similar brand) (i)15 mm dia.	4	Each	539.00	2,156.00
27.	Supplying fitting fixing iron socket bolt. a) 150 mm long,10 mm dia bolt.	60	Each	63.00	3,780.00
28.	Supplying fitting fixing 0.50 H.P. Centrifugal pump motor set self priming model mini master- II, single phase of approved brand including all necessary platform completed.	1	job	5,700.00	5,700.00
29.	Priming one coat on timber, plastered surface with synthetic oil bound primer of approved quality including smoothing surfaces by sand papering etc.	135.00	Sq.m	38.00	5,130.00
30.	Priming one coat on steel or other metal surface with synthetic oil bound primer of approved quality including smoothing surfaces by sand papering etc	120.00	Sq.m	29.00	3,480.00
31.	Painting with best quality synthetic enamel paint of approved make and brand including smoothing surface by sand papering etc. including using of approved putty etc. on the surface, if necessary : (a) On timber or plastered surface : With super gloss (hi-gloss) - Two coats (with any shade except white)	135.00	Sq.m	81.00	10,935.00
32.	Painting with best quality synthetic enamel paint of approved make and brand including smoothing surface by sand papering etc. including using of approved putty etc. on the surface, if necessary : (a) On steel or other metal surface : With super gloss (hi-gloss) - Two coats (with any shade except white)	120.00	Sq.m	79.00	9,480.00
33.	White washing including cleaning and smoothing surface Thoroughly. a) Two coats	320.00	Sq.m	18.14	5,805.00
34.	Applying Exterior grade Acrylic Primer of approved quality and brand on plastered or concrete surface old or new surface to receive decorative textured (matt finish) or smooth finish acrylic exterior emulsion paint including scraping and preparing the surface thoroughly, complete as per manufacturer's specification and as per direction of the EIC. (a)One coat	231.00	Sq.m	31.40	7,253.00
35.	Protective and Decorative Acrylic exterior emulsion paint of approved quality, as per manufacturer's specification and as per direction of EIC to be applied over acrylic primer as required. The rate includes cost of material, labour, scaffolding and all incidental charges but excluding the cost of primer. (a)Premium 100% Acrylic Emulsion	231.00	Sq.m	84.00	19,404.00

Total=Rs.2, 65,555.00

Add G.S.T.@ 12%(CGST 6% + SGST 6%) +=Rs. 31,867.00

Total= Rs.3, 30,287.00

Add labour welfare cess @1% (+) =Rs. 2,974.00

Total= Rs. 3,00,396.00

(Signature)
Executive Engineer
Directorate of Textiles (Sericulture,
Government of West Bengal